

2500KG SHORT JIB

FJA-19-252

The 2500kg short jib is designed as an affordable general-purpose jib compact enough to be able to manoeuvre in confined spaces. This slip-on attachment is held to the forklift by a safety chain. The jibs fully extended reach is 1.96m and its closed length is 1.30m. This comes in a galvanised finish and includes a manual/certificate, safety chain and swivel hook.

Specifications;

- Safe Working Load 2500kg
- Pocket Size 135 x 60mm
- Pocket Centres 275mm
- Load Centre 790mm
- Horizontal C of G 630mm
- Vertical C of G 135mm
- Unit Weight 100kg
- Manufactured strictly in accordance with AS 2359.1



Detail	Safe Working Load (SWL) Per Position			
	1	2	3	4
Position	1	2	3	4
Extension (mm)	790	1200	1580	1960
SWL (kg)	2500	1200	900	750


2500KG LONG JIB

FJA-19-257

This jib is designed as an excellent and essential standby for handling the occasional long/awkward load with a 3.50m reach when fully extended and closed length of 2.10m. Simply slide the fork tines into the fork pockets then secure the forklift carriage with the safety chain supplied. This comes galvanised finish and includes a manual/certificate, safety chain and swivel hook.

Specifications;

- Safe Working Load 2500kg
- Pocket Size 135 x 60mm
- Pocket Centres 275mm
- Load Centre 950mm
- Horizontal C of G 1400mm
- Vertical C of G 50mm
- Unit Weight 135kg
- Manufactured strictly in accordance with AS 2359.1

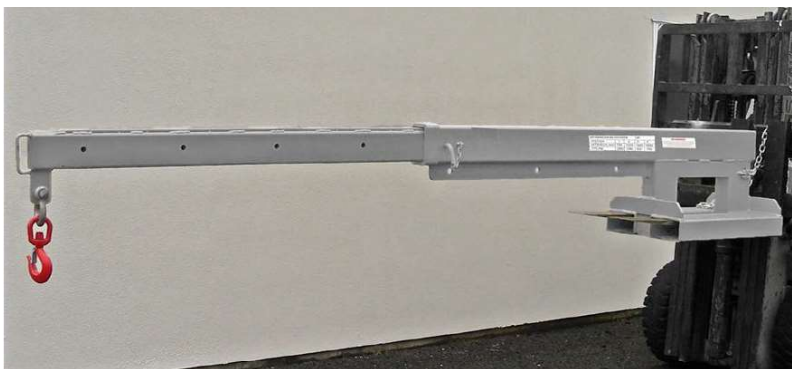

Detail	Safe Working Load (SWL) Per Position							
	1	2	3	4	5	6	7	8
Position	1	2	3	4	5	6	7	8
Extension (mm)	950	1410	1870	2000	2380	2760	3140	3520
SWL (kg)	2500	2500	1900	1650	1250	650	380	240