


# Polyester Endless Webbing Sling



## Features

- » Excellent adhesion when using PU sling coating.
- » Equal pressure distribution over tension and pressure sensitive loading.
- » UV-resistant, eliminating material ageing or embrittlement.
- » Heat resistant up to +120.
- » Moisture-resistant fabric thus preventing frost damage (up to approx. - 40)
- » Super lifting slings are available with different safety factor and also for one way use.
- » Duplex construction from PU-starched thermally fixed web fabric.
- » According to **EN 1492-1:2000**.

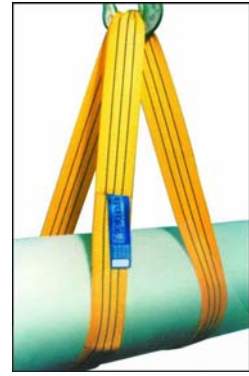

Colour coded according to EN 1492-1	Working Load Limit with 1 webbing sling							Working Load Limit with 2 webbing slings			
	Straight lift	Choked lift	$\beta$					Straight lift to up 45°	Choked lift up to 45°	Straight lift 45°-60°	Choked lift 45°-60°
			0°-7°	7°-45°	45°-60°	up to 45°	45°-60°				
	1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.12	1.0	0.8
<b>WLL 1T</b>	1.000	800	2.000	1.400	1.000	700	500	1.400	1.120	1.000	800
<b>WLL 2T</b>	2.000	1.000	4.000	2.800	2.000	1.400	1.000	2.800	2.240	2.000	1.000
<b>WLL 3T</b>	3.000	2.400	6.000	4.200	3.000	2.100	1.500	4.200	3.360	3.000	2.400
<b>WLL 4T</b>	4.000	3.200	8.000	5.600	4.000	2.800	2.000	5.600	4.480	4.000	3.200
<b>WLL 5T</b>	5.000	4.000	10.000	7.000	5.000	3.500	2.500	7.000	5.600	5.000	4.000
<b>WLL 6T</b>	6.000	4.800	12.000	8.400	6.000	4.200	3.000	8.400	6.700	6.000	4.800
<b>WLL 8T</b>	8.000	6.400	16.000	11.200	8.000	5.600	4.000	11.200	8.960	8.000	6.400
<b>WLL 10T</b>	10.000	8.000	20.000	14.000	10.000	5.600	4.000	14.000	11.200	10.000	8.000



## Polyester Round Sling

### Features

- » Polyester round sling with heavy duty sleeves.
- » Low elongation.
- » According to **EN 1492-2:2000**.
- » Extremely wear-resistant.
- » Extra strong PU-impregnated webbing of the sleeve, which does not allow dirt to enter.
- » Each sling is issued with an individual Test Certificate.

Colour coded according to EN 1492-1	Working Load Limit with 1 round sling							Working Load Limit with 2 round slings			
	Straight lift	Choked lift	$\beta$					Straight lift to up 45°	Choked lift up to 45°	Straight lift 45°-60°	Choked lift 45°-60°
			0°-7°	7°-45°	45°-60°	up to 45°	45°-60°				
	1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.12	1.0	0.8
<b>WLL 1T</b>	1.000	800	2.000	1.400	1.000	700	500	1.400	1.120	1.000	800
<b>WLL 2T</b>	2.000	1.600	4.000	2.800	2.000	1.400	1.000	2.800	2.240	2.000	1.600
<b>WLL 3T</b>	3.000	2.400	6.000	4.200	3.000	2.100	1.500	4.200	3.360	3.000	2.400
<b>WLL 4T</b>	4.000	3.200	8.000	5.600	4.000	2.800	2.000	5.600	4.480	4.000	3.200
<b>WLL 5T</b>	5.000	4.000	10.000	7.000	5.000	3.500	2.500	7.000	5.600	5.000	4.000
<b>WLL 6T</b>	6.000	4.800	12.000	8.400	6.000	4.200	3.000	8.400	6.720	6.000	4.800
<b>WLL 8T</b>	8.000	6.400	16.000	11.200	8.000	5.600	4.000	11.200	8.960	8.000	6.400
<b>WLL 10T</b>	10.000	8.000	20.000	14.000	10.000	7.000	5.000	14.000	11.200	10.000	8.000
<b>WLL 12T</b>	12.000	9.600	24.000	16.800	12.000	8.400	6.000	16.800	13.440	12.000	9.600

