


SPREADER BEAMS

The crane spreader beam is available in a range of capacities and lengths to suit any application. Crane spreader beams are supplied standard with 2 lift positions starting with a 500kg capacity.

The standard finish on all crane spreader beams is painted enamel in safety yellow. Aluminium beams are also available. The chart below details the standard range of crane spreader beams we stock. Choose the safe working load and beam length to suit your application. Custom size and capacity available on request.

Product Code	Safe Working Load (kg)	Length (m)
SB-0520	500	2
SB-0540	500	4
SB-1020	1000	2
SB-1040	1000	4
SB-2020	2000	2
SB-2040	2000	4
SB-3020	3000	2
SB-3040	3000	4

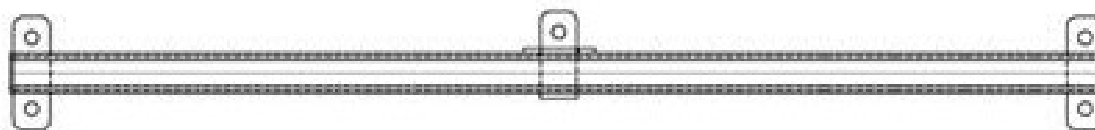

C HOOKS

C hooks attachments are designed to handle and lift coils of product in a balanced controlled way. A wide range of capacities, sizes and design styles are available to suit client requirements. There are several types of C Hook available for your application (from left to right) Turner C, Double C, Rotating C, Coil Clamp, 3 Hook and Simple C.

Specifications;

- Designed to lift and transport one coil at a time
- Counterweight self-balanced structure
- Easy hand manipulation through side handle
- Coatings and protective strips are available to product whilst in transit to avoid damage, under customers request
- Minimum height loss

