

SINGLE PHASE, SINGLE SPEED

250KG – 2000KG

Body: Light Aluminium alloy body which is light but very hard wearing. Fit for use in extreme work environments with a high heat dissipation rate. IP 54 Protection rating.

Anti-phase Protection Device: An electrical control system which prevents the hoist from working if the incoming power supply is not wired to the hoist correctly.


Limit switches: Upper and lower limit switches are installed as standard equipment to prevent the over raising or lowering of the load.

Pendant: 24V safety protection with light touch push buttons.

Braking Mechanism: The magnetic braking system responds instantly and will safely support the load during a power failure.

Chain Bag: Manufactured from tough and durable PVC product.

Load Chain: FEC80 chains are manufactured from a special alloy steel and when hardened have a super-tough carbonised outer surface.

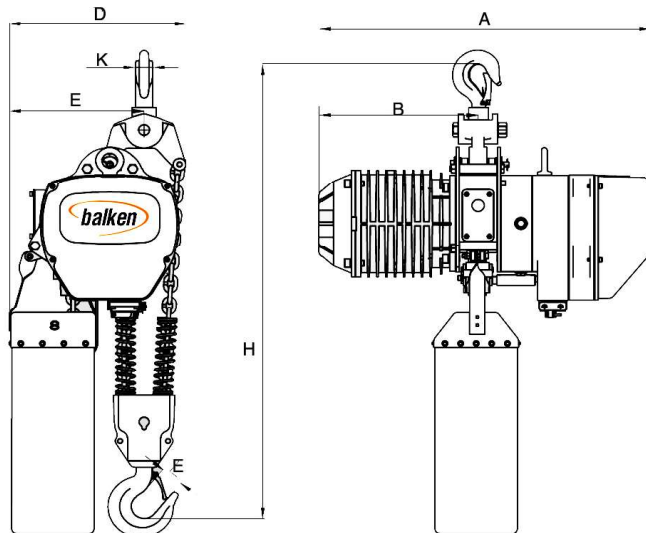

Model		BECH-10256	BECH-1056	BECH-116	BECH-126
Capacity (t)		0.25	0.5	1	2
Lifting Speed (m/min)		7.2	3.6	3.4	1.7
Motor Power (kw)		0.8	0.8	1.5	1.5
Rotation Speed (r/min)		1440			
Insulation Grade		F			
Phase		1			
Voltage		220V			
Hz		50			
Dimensions for Single Phase Electric Hoist	H	580	580	650	835
	A	535	535	585	585
	B	265	265	280	280
	D	290	290	300	310
	E	180	180	176	236
	K	20	20	24	30
	L	28	28	34	40