


MANUAL GIRDER TROLLEY

500KG - 10,000KG


- Adjustable to suit many beam widths by simply changing the number of spacers.
- Smooth horizontal running.
- Buffer block pieces can prevent hitting and avoid the trolley dropping from the rail.
- Suitable for light manual lifting operation.
- High grade sealed ball bearings.
- A contour wheel design provides maximum beam contact on flat or tapered beams.

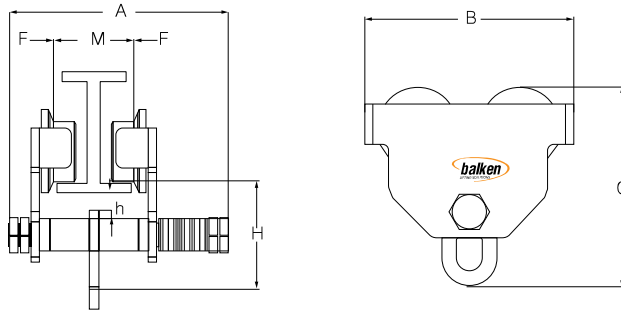

Model	Capacity (t)	Min radius of curve	Dimensions (mm)						Weight (kg)
			A	B	C	H	M	F	
MT-0-50	0,5	0,9	210	195	180	90	68-203	≈3	5,5
MT-1-00	1,0	1	230	210	200	95	80-203	≈3	8,2
MT-1-50	1,5	1	245	250	223,5	125	80-203	≈3	13
MT-2-00	2,0	1,1	245	250	223,5	125	80-203	≈3	13
MT-3-00	3,0	1,3	280	280	228,5	140	88-203	≈3	21
MT-5-00	5,0	1,4	335	335	334,5	170	100-203	≈3	34
MT-10-00	10,0	1,7	345	460	490	275	122-203	≈3	89

MANUAL GEARED TROLLEY

1,000KG - 10,000KG

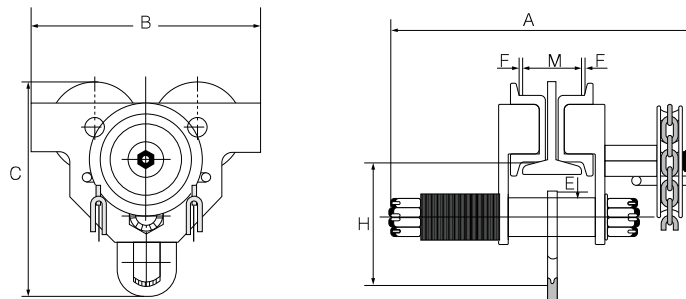

Model	Capacity (t)	Min radius of curve	Dimensions (mm)						Weight (kg)
			A	B	C	E	F	H	
GT-1-00	1,0	1	390	260	239	32,5	≈3	136	20
GT-2-00	2,0	1,1	400	300	286	31	≈3	161	29
GT-3-00	3,0	1,3	430	345	336	35	≈3	185	47
GT-5-00	5,0	1,4	444	390	393	37	≈3	220	58
GT-10-00	10,0	1,7	489	470	500	45	≈3	280	105