

## Fork Spreader

FJA-19-(625/626)


Fork spreaders have been designed to safely lift extra wide or flexible loads, helping to prevent goods such as roof sheets, timber or plasterboard becoming damaged.

The fork spreader evenly distributes the load over the length of the attachment while moving/transporting. This slip-on attachment is simple to use and is secured to the lift truck by a safety chain. Often used to stabilise wide loads of unstable products such as gyprock, steel bar or pipe that is manufactured and supplied in long random lengths.

The fork mounted spreader beam mounts over the forks of any standard forklift truck in seconds, adding stability to the load by means of a rigid beam carrying two extra forks. When elevated, the load acts as a single unit, eliminating any sag that could cause it to fall.

### Specs

- > Working Load Limit (WLL)
- > Fork length: 1200mm
- > Pocket size: 160 x 60mm
- > Pocket centres: 775mm
- > Horizontal centre of gravity: 300mm
- > Vertical centre of gravity: 60mm
- > Manufactured strictly in accordance with AS 2359.1

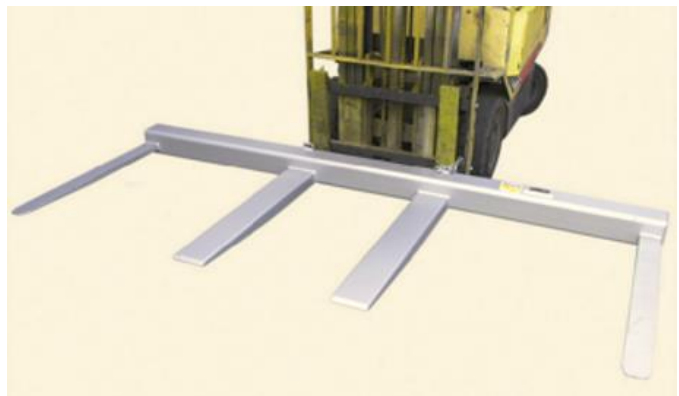

Stock Code	WLL (kg)	Width (mm)	Fork Pockets (mm)	Pocket Centres (mm)	Weight (kg)
FJA-19-625	2500	3000	160 x 60	775	225
FJA-19-626	2500	5000	160 x 60	775	240