

Helping New Zealand manufacturers safely solve their lifting challenges with the best local and global solutions

TECHNICAL DATA SHEET

BALKEN G2 ELECTRIC CHAIN HOIST - DUAL SPEED -500KG CAPACITY

MODEL: DEH-3056/2S





DESCRIPTION

Balken Generation 2 - Industrial Electric Chain Hoist is a dual speed, 3 phase hoist, with a 500kg capacity. It features a 6 metre lift as standard.

FEATURES

- Balken Generation 2 Electric Chain Hoist manufactured for Stratalign by Delta Hoists, Netherlands.
- Built to European Standard Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.
- ➡ Made to the EU Electrical Safety Standard BS EN 60204-32:2008
- E Design Verified by NZ registered Chartered Professional Engineer.
- 🛏 Robust aluminium housing.
- Compact hook to hook measurement.
- Hoist is IP55 rated and pendant control is IP65 rated.
- Swivel load hook.
- Electrical Control system with SIEMENS/EATON components for durability and quality.
- Permanently lubricated transmission, ensures smooth and quiet operation.
- Supplied with pendant control switch with e-stop, power cable and chain container.





sales@stratalign.co.nz www. stratalign.co.nz



6 Harbour Ridge Drive, Wiri, Auckland, 2104



TECHNICAL DATA SHEET

BALKEN G2 ELECTRIC CHAIN HOIST - DUAL SPEED - 500KG CAPACITY

MODEL: DEH-3056/2S

SPECIFICATIONS

SPECIFICATIONS								
Operating Voltage	400V / 50Hz / 3Ph							
Lifting Speeds	2/8 m/min							
Load Chain	Load chain according to EN 818-7-DAT/DT							
Pendant Control Cable	6 metre							
Power Cable	\approx 4.5 metre without plug							
Hoist Protection	IP 55							
Pendant Control Protection	IP 65							
Classification	M5/2m (ISO/FEM)							
Duty cycle / Starts per hour	40% / 240							
Insulation Class	F							
Operating Temperature	-10°C - +40°C							
PROTECTION								
Control Switch	24V pendant control switch with emergency stop button							
Overload Protection	Externally adjustable slip clutch							
Brake	Electromagnetic spring pressure brake, holds the load in the event of power failure							
Limit Switch	Electro-mechanical upper and lower limit switch							
Thermal Protection	Protected through heat sensor							

CAPACITY	LIFTING SPEEDS	LOAD CHAIN	CHAIN FALLS	POWER OUTPUT	NET WEIGHT
kg	m/min	Ømm		kW	kg
500	2/8	5 x 15	1	0.18/0.72	33

OPTIONS



Remote Control Two button - Single Speed Easy Plug & Play Connection Eye Suspension

Custom load chain and pendant cable lengths available

Larger capacity chain buckets available



09 263 7725 (Auckland) 03 222 2836 (Christchurch)



sales@stratalign.co.nz www. stratalign.co.nz



6 Harbour Ridge Drive, Wiri, Auckland, 2104




Helping New Zealand manufacturers safely solve their lifting challenges with the best local and global solutions

TECHNICAL DATA SHEET

BALKEN G2 ELECTRIC CHAIN HOIST - DUAL SPEED -500KG CAPACITY

MODEL: DEH-3056/2S







09 263 7725 (Auckland) 03 222 2836 (Christchurch)



sales@stratalign.co.nz www. stratalign.co.nz



6 Harbour Ridge Drive, Wiri, Auckland, 2104




Helping New Zealand manufacturers safely solve their lifting challenges with the best local and global solutions

TECHNICAL DATA SHEET

BALKEN G2 ELECTRIC CHAIN HOIST - DUAL SPEED - 500KG CAPACITY

MODEL: DEH-3056/2S

DIMENSIONS

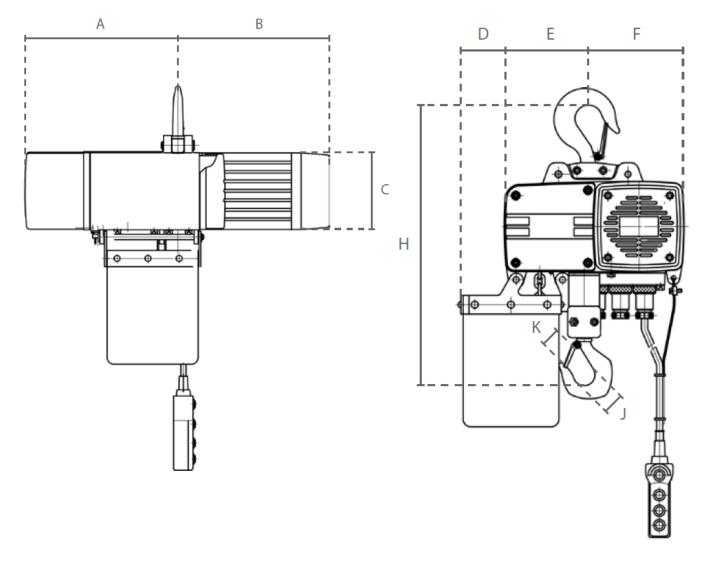

HOIST DIMENSIONS (MM)											
А	В	С	D	E	F	н	J	K			
231	204	165	62	118	162	465	40	27			





