ATIS MIRUS 200

Pneumatic manipulator with rigid articulated arms, this is an upgrade of the previous model in the range. Developed with the same technical and structural characteristics, it is equipped with an additional pneumatic cylinder in order to handle greater flow rates. It can be integrated with a customised gripping system depending on the type of work to be carried out.

260 KG
EXTIMATED CAPACITY AT THE FLANGE

3250 MM
RADIUS

2250 MM
VERTICAL STROKE

OFFSET LOADS

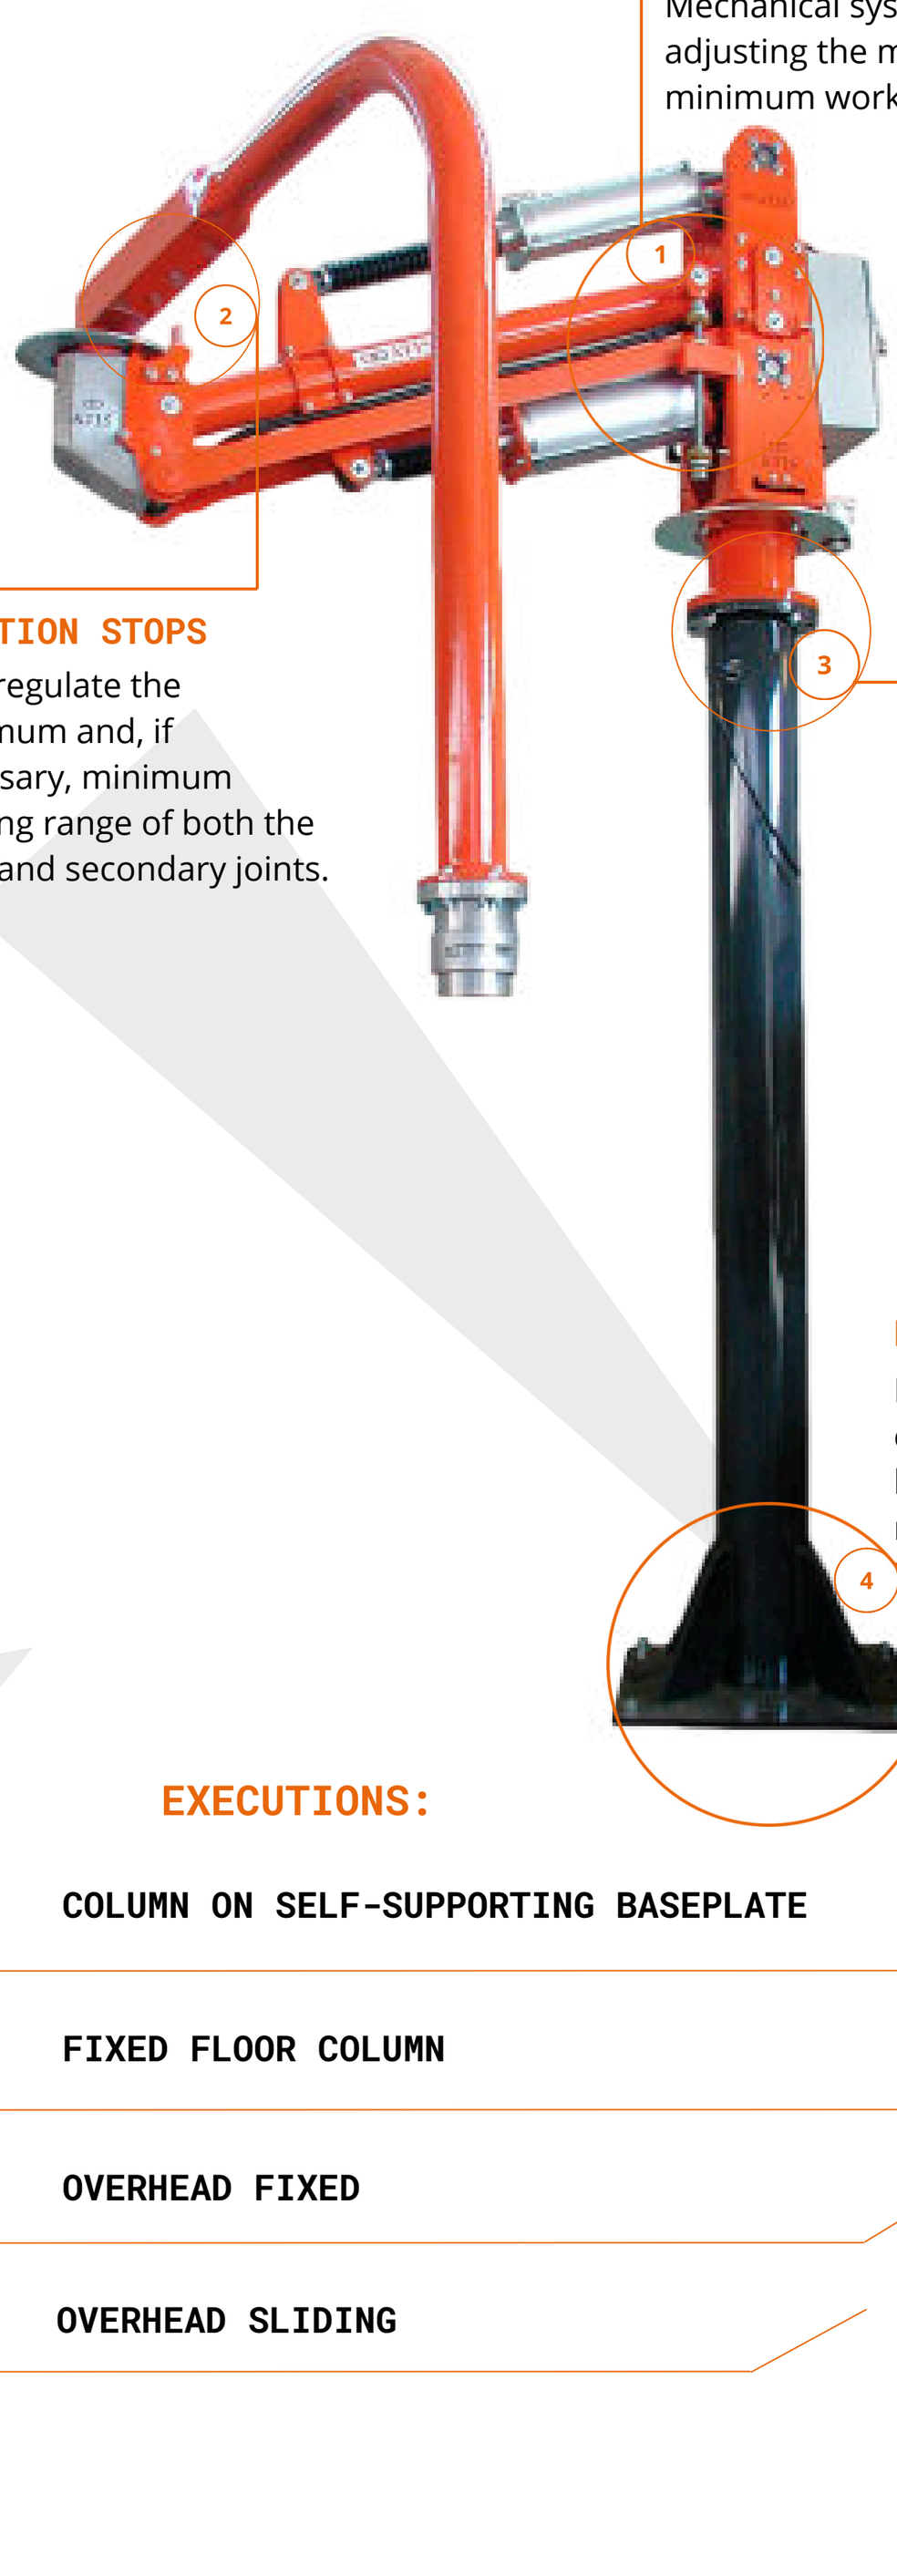

VERTICAL EXCURSION LOCK

Mechanical system for self-adjusting the maximum and minimum working height.

ROTATION STOPS

They regulate the maximum and, if necessary, minimum working range of both the main and secondary joints.

CONNECTION FLANGE

Allows installation in both column and wall-mounted configurations.

FASTENING PLATE

For fixing to the floor or on a self-supporting base, equipped with reinforcement gussets

EXECUTIONS:

- COLUMN ON SELF-SUPPORTING BASEPLATE
- FIXED FLOOR COLUMN
- OVERHEAD FIXED
- OVERHEAD SLIDING

ATIS
MANIPOLATORI PNEUMATICI