

Hinged Container Ramp


FCR-18-065

Our FCR-18-065 hinged container ramp is designed for bridging into standard containers from ground level. The self-levelling lip allows for full load capacity when on slightly uneven ground. The ramp footing folds up to allow access to the fork slippers for transport. Hand grip loops are provided for this purpose. Constructed with an anti-slip chequer plate deck and heavy 10mm support ribs beneath, they are built to last in a high use environment. The chequered tread plate decking provides grip in wet conditions. The standard finish is enamel painted safety yellow.

Specs

- >Working Load Limit (WLL) of 6500kgs
- >Pocket size 165 x 60mm
- >Pocket centres 775 mm
- >Made from a chequer plate deck and 10mm support ribs on underside reduce bowing and distortion
- >Manufactured strictly in accordance with AS 2359

Product Code	SWL (kg)	Overall Length (mm)	Overall Width (mm)	Net Weight (kg)
FCR-18-065	6500	2000	2200	275

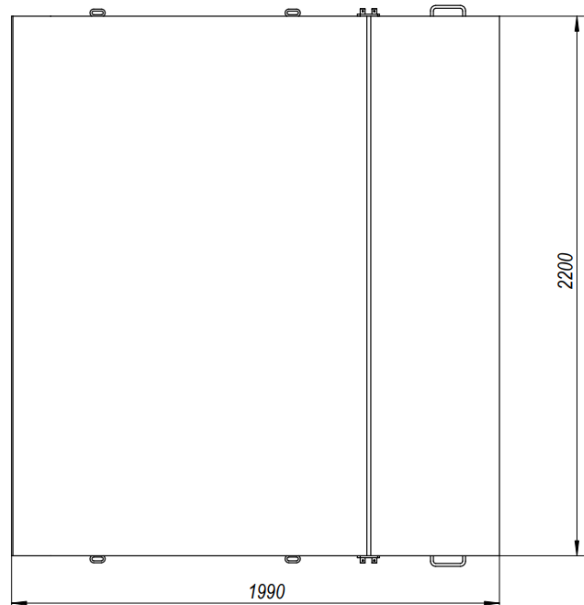

PO 1
 Tel: 09 263 7725 Fax: 09 262 0970 Email: sales@strataalign.co.nz

OVERHEAD GANTRY CRANES, JIB CRANES, PORTABLE GANTRY CRANES, VACUUM LIFTERS, HOISTS, WINCHES, MAGNETIC CLAMPS, FORKLIFT & CRANE ATTACHMENTS