

TECHNICAL DATA SHEET

SPREADER & LIFTING BEAM (ADJUSTABLE) - UP TO 10000KG

MODEL: FSB-09



DESCRIPTION

The Combination Lifting and Spreader Beam is a versatile adjustable beam that lifts long or large loads either from the centre as a lifting beam or from both ends as a spreader beam when used with a 2-leg sling and an overhead crane or forklift.

FEATURES

- ❑ Load connection points are adjustable to 3 positions by moving the extendable arm in position
- ❑ The 600mm long slipper pockets allow fast and safe connection to the truck
- ❑ Safety pins included, used to securely lock extendable arm in position
- ❑ Fitted with 2 safety swivel hooks
- ❑ Zinc finish on extendable arms, enamel paint finish on main body



09 263 7725 (Auckland)
03 222 2836 (Christchurch)



sales@stratalign.co.nz
www.stratalign.co.nz



6 Harbour Ridge Drive,
Wiri, Auckland, 2104

TECHNICAL DATA SHEET


SPREADER & LIFTING BEAM (ADJUSTABLE) - UP TO 10000KG

MODEL: FSB-09

FSB-09-120 SPECIFICATIONS

PRODUCT CODE	USED AS A:	RATED CAPACITY			FORK POCKET		UNIT WEIGHT (KG)
		FULLY RETRACTED (LC@1200MM)	MIDDLE POSITION (LC@1350MM)	FULLY EXTENDED (LC@1690MM)	SIZE (MM)	CENTRE (MM)	
FSB-09-120	FORKLIFT ATTACHMENT	4500KG	4000KG	3500KG	188 X 88	600	138
	LIFTING BEAM	5000KG	4500KG	4000KG			
	SPREADER BEAM	6000KG	6000KG	6000KG			

DIMENSIONS

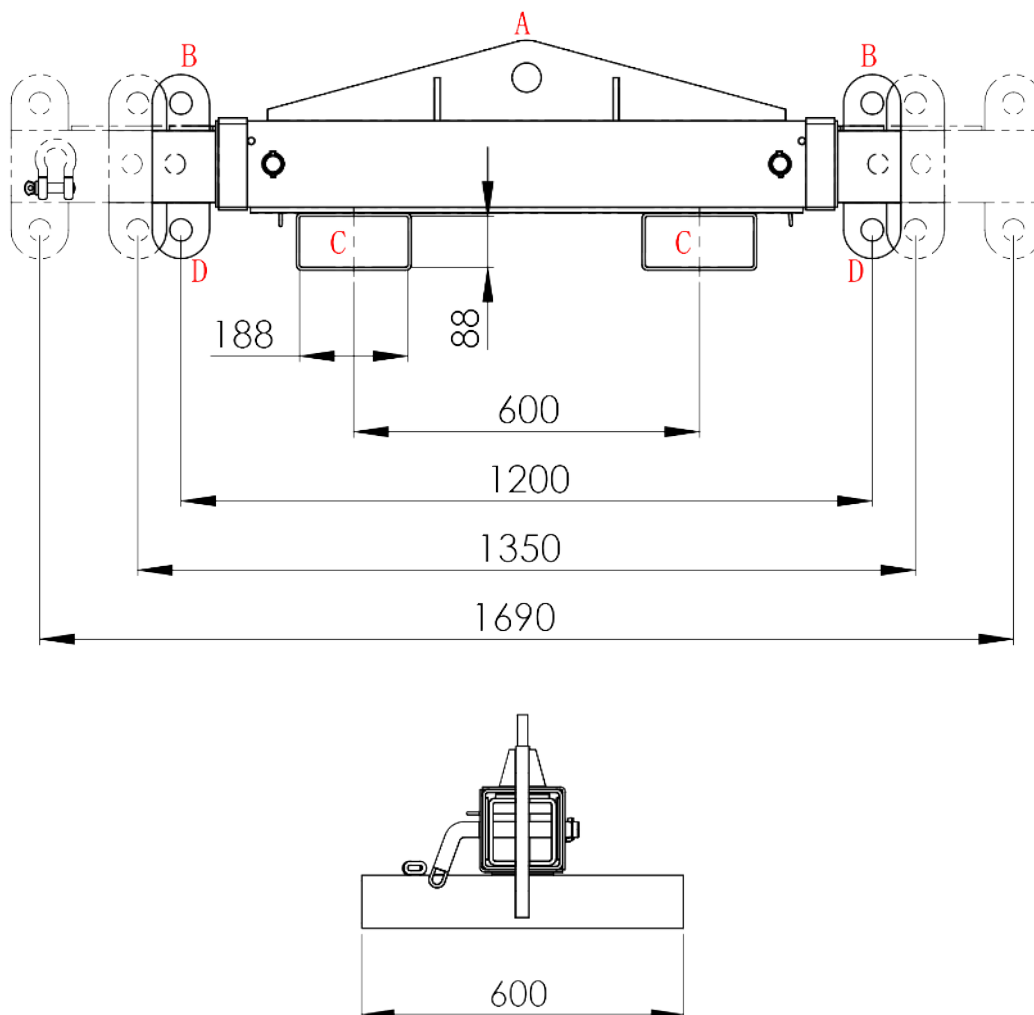

09 263 7725 (Auckland)
03 222 2836 (Christchurch)



sales@stratalign.co.nz
www.stratalign.co.nz



6 Harbour Ridge Drive,
Wiri, Auckland, 2104

TECHNICAL DATA SHEET


SPREADER & LIFTING BEAM (ADJUSTABLE) - UP TO 10000KG

MODEL: FSB-09

FSB-09-240 SPECIFICATIONS

PRODUCT CODE	USED AS A:	RATED CAPACITY			FORK POCKET		UNIT WEIGHT (KG)
		FULLY RETRACTED (LC@2405MM)	MIDDLE POSITION (LC@3165MM)	FULLY EXTENDED (LC@3925MM)	SIZE (MM)	CENTRE (MM)	
FSB-09-240	FORKLIFT ATTACHMENT	5600KG	2900KG	1400KG	185 X 80	900	260
	LIFTING BEAM	6000KG	4500KG	2400KG			
	SPREADER BEAM	10,000KG	10,000KG	10,000KG			

DIMENSIONS

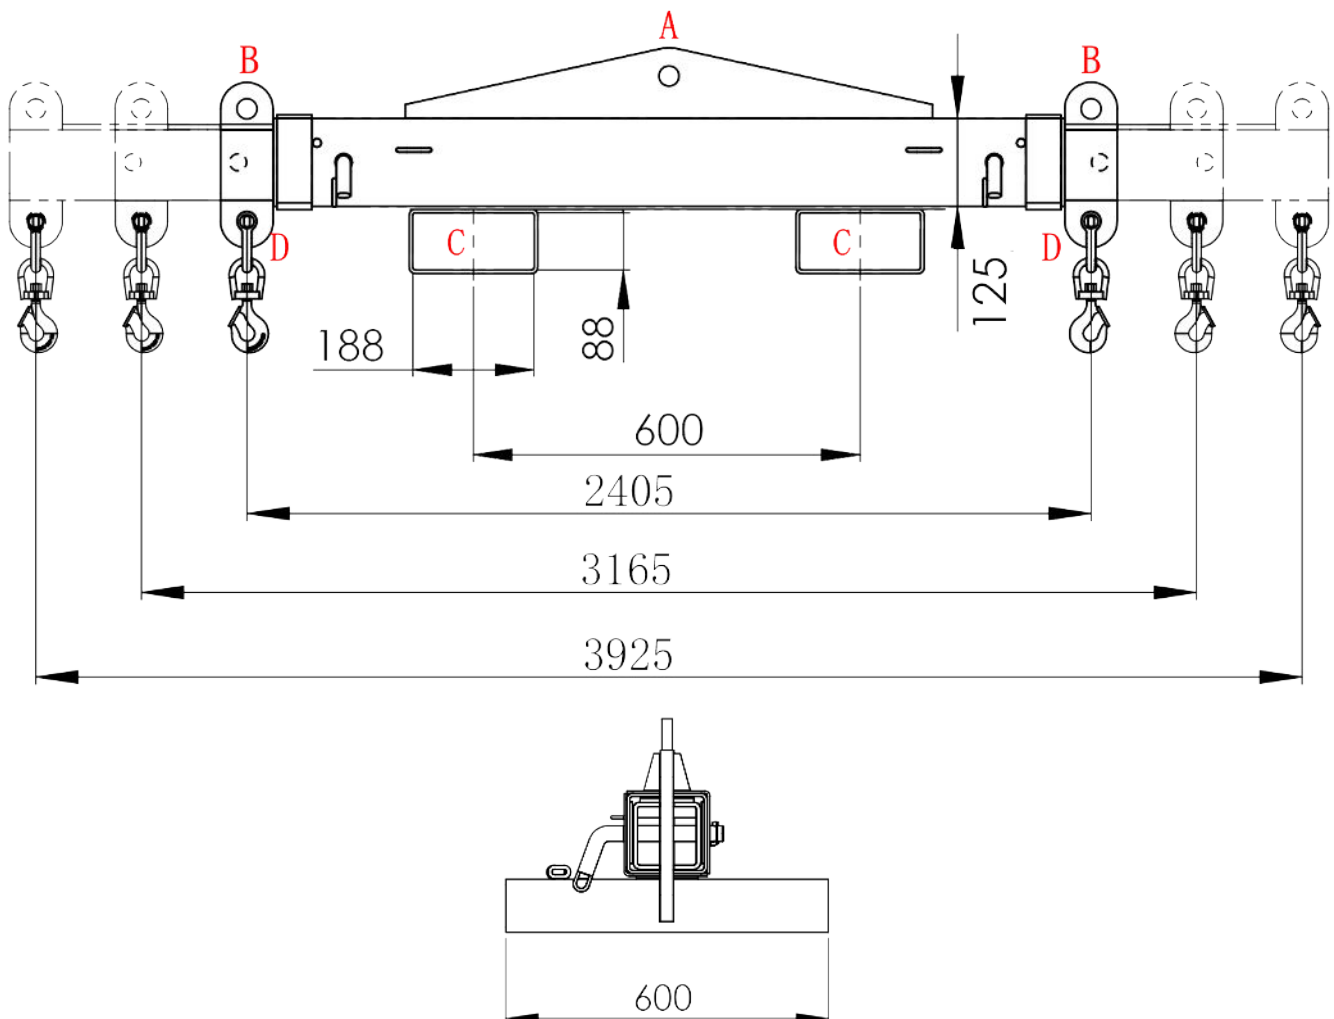

09 263 7725 (Auckland)
03 222 2836 (Christchurch)



sales@stratalign.co.nz
www.stratalign.co.nz



6 Harbour Ridge Drive,
Wiri, Auckland, 2104

TECHNICAL DATA SHEET

SPREADER & LIFTING BEAM (ADJUSTABLE) - UP TO 10000KG


MODEL: FSB-09

FSB-09-300 SPECIFICATIONS

PRODUCT CODE	USED AS A:	RATED CAPACITY					
		FULLY RETRACTED (LC@2920MM)	MIDDLE POSITION (LC@3300MM)	FULLY EXTENDED (LC@3680MM)	FULLY RETRACTED (LC@4060MM)	MIDDLE POSITION (LC@4440MM)	FULLY EXTENDED (LC@5000MM)
FSB-09-300	FORKLIFT ATTACHMENT	4300KG	3000KG	2200KG	2000KG	1600KG	1000KG
	LIFTING BEAM	4600KG	4200KG	3500KG	3200KG	2600KG	1800KG
	SPREADER BEAM	10,000KG	10,000KG	10,000KG	10,000KG	10,000KG	10,000KG

PRODUCT CODE	FORK POCKET		UNIT WEIGHT (KG)
	SIZE (MM)	CENTRE (MM)	
FSB-09-300	188 X 88	600	276

DIMENSIONS

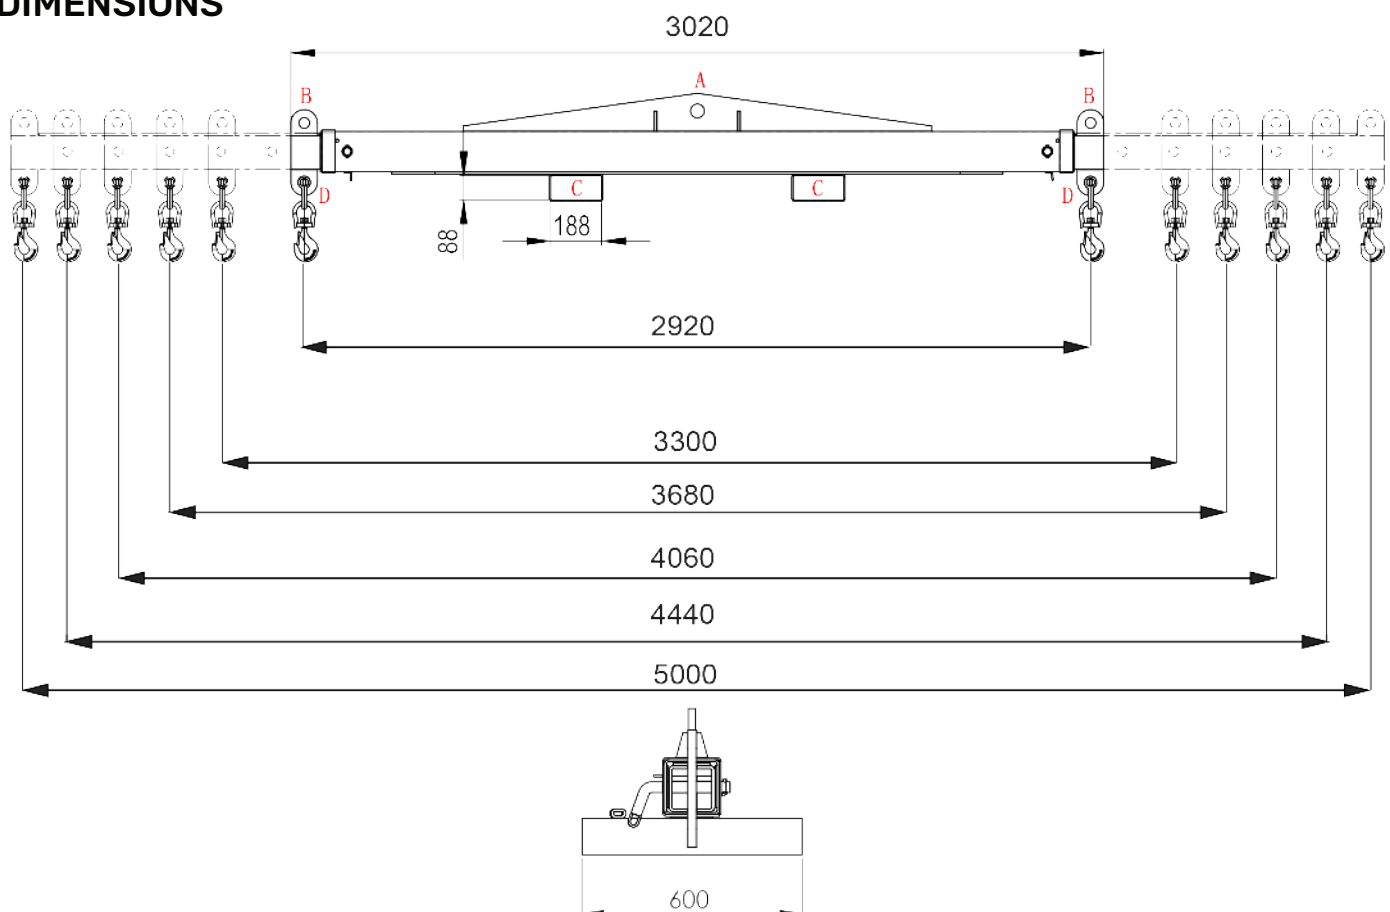

09 263 7725 (Auckland)
03 222 2836 (Christchurch)



sales@stratalign.co.nz
www.stratalign.co.nz



6 Harbour Ridge Drive,
Wiri, Auckland, 2104

TECHNICAL DATA SHEET

SPREADER & LIFTING BEAM (ADJUSTABLE) - UP TO 10000KG

MODEL: FSB-09

CERTIFICATION

Manufactured strictly in accordance with the following standards:

STANDARD	DESCRIPTION
AS 2359.1	Powered Industrial Trucks
AS 1418.1	Design
AS 4991	Testing Standard
AS 3990	Structural Steel for Mechanical Engineering
AS1554..	Structural Steel Welding



09 263 7725 (Auckland)
03 222 2836 (Christchurch)



sales@stratalign.co.nz
www.stratalign.co.nz



6 Harbour Ridge Drive,
Wiri, Auckland, 2104